

VT 10



ON /OFF ON ONE VALVE
MONO FREQUENCY
1.5v AAA BATTERY



VT 40



6 PRESET KEYS (1 KEY = 1 CAR MODEL)
BUZZER AND RECEPTION LED INDICATORS
LOW BATTERY STATUS
RECHARGEABLE BATTERY
OPTIONS AND ACCESSORIES: PROTECTIVE HOLSTER

VT 50



UNIVERSAL TOOL
EMISSION = LF 125 KHZ (OPTIONAL RF) EX : 433 AND 315 MHZ
4 FREQUENCIES OF RECEPTION AMONG 315 MHZ - 433,92 MHZ - 434,42 MHZ
BUZZER AND RECEPTION LED INDICATORS CORRECT / INCORRECT
9 V BATTERY - LOW BATTERY SATUS
DISPLAY THE DATA (MODE, NUMBER, PRESSURE ETC...) HELD ON THE TPM
UPGRADEABLE AS NEW MODULATED PROTOCOLS ARE INTRODUCED IN THE MARKETPLACE
OPTIONS AND ACCESSORIES: PROTECTIVE HOLSTER

VT 60



UNIVERSAL TOOL
EMISSION = LF 125 KHZ (OPTIONAL RF) EX : 433 AND 315 MHZ
4 FREQUENCIES OF RECEPTION AMONG 315 MHZ - 433,92 MHZ - 434,42 MHZ
BUZZER AND RECEPTION LED INDICATORS CORRECT / INCORRECT
INTERNAL BATTERY LI-ION CHARGER - LOW BATTERY STATUS
DISPLAYS THE DATA (MODE, NUMBER, PRESSURE ETC...) HELD ON THE TPM
USB - RS232 PORT
UPGRADEABLE AS NEW MODULATED PROTOCOLS ARE INTRODUCED IN THE MARKETPLACE
OPTION: VALVE SIMULATOR - BLUE TOOTH - PROTECTIVE HOLSTER

VT 70




UNIVERSAL TOOL
EMISSION = LF 125 KHZ (OPTIONAL RF) EX : 433 AND 315 MHZ
4 FREQUENCIES OF RECEPTION AMONG 315 MHZ - 433,92 MHZ - 434,42 MHZ
BUZZER AND RECEPTION LED INDICATORS CORRECT / INCORRECT
INTERNAL BATTERY LI-ION CHARGER - LOW BATTERY STATUS
DISPLAYS THE DATA (MODE, NUMBER, PRESSURE ETC...) HELD ON THE TPM
USB - RS232 PORT
UPGRADEABLE AS NEW MODULATED PROTOCOLS ARE INTRODUCED IN THE MARKETPLACE
TRIGGER GUN / SMALL POCKET BELT / HANDLE / SAFETY CHAIN
OPTION: BLUE TOOTH - PROTECTIVE HOLSTER

VT



2 VERSIONS: LONG AND SHORT NOZE
LF (TX) 125 KHZ CONTINUOUS OR MODULATED (OOK)
RF (RX) 2 FREQUENCIES AMONG 315 MHZ - 433,92 MHZ - 434,42 MHZ AVAILABLE WITH MANCHESTER OR NRZ ENCODING (OTHERS ON REQUEST)
LCD DISPLAY 1 DEL PER WHEEL (5 IN TOTAL)
INTERNAL LI-ION BATTERY CHARGER WITH EXTERNAL 24V POWER SUPPLY
CAN CONNEXION AND RS 232 PORT

VT520

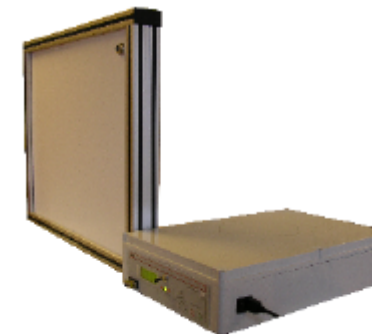

2 VERSIONS: LF/RF AND RF/RF
2 CASE CONFIGURATION (INTEGRATED OR EXTERNAL ANTENNA)
MEMORIZE SEVERAL TYPES OF VALVES
ADJUSTMENT OF THE POWER OF EMISSION
INTERFACING THROUGH E/S TOR OR RS232/485
SET UP WITH PC OR WINATEQ SOFTWARE
PARAMETERS BACKUP
WEIGHT: 4 KG

CASE DIMENSIONS (INTEGRATED ANTENNA):
H x L x D : 105 x 395 x 590 MM

